



1

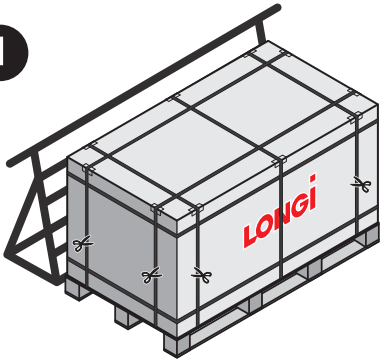

需要将待拆包的整托组件长边靠近坚实的支撑物：优先防倒支架、墙壁或者一托同规格且未拆组件(距离约为 15~20cm)，然后用工具剪断外包装全部打包带。

The long side of the whole pallet assembly to be unpacked against solid supports: an anti-fall bracket, a wall or another undismantled component of the same specification (the distance is about 15~20cm), and then cut all the packaging tape of the outer packaging with a tool.


2

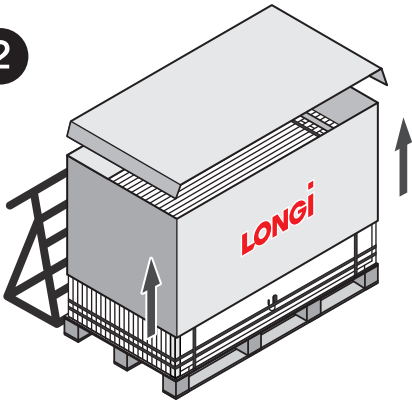

先移去箱盖上的覆盖膜和围板四周的缠绕膜，同时移除上盖；然后将围板上的玻纤胶带两端撕开，最后需要两人一起向上移除围板。

First remove the covering film on the lid and the wrapping film around the sealing plate, while remove the top cover. Then tear off both ends of the glass fiber tape on the sealing plate, and finally remove the hoarding upwards.


3

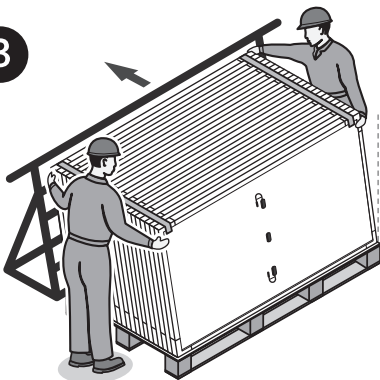

两人扶住组件，防止组件倾倒，第三人拆开打包带和内护楞；* 请勿移除玻纤胶带，然后轻推使组件斜靠在支撑物上。

Two people hold on to the modules to prevent them from tipping. The third person disassembles the strapping strap and inner corrugation; Please not remove the fiberglass tape, and then gently pushes the modules to lean against the support.

4

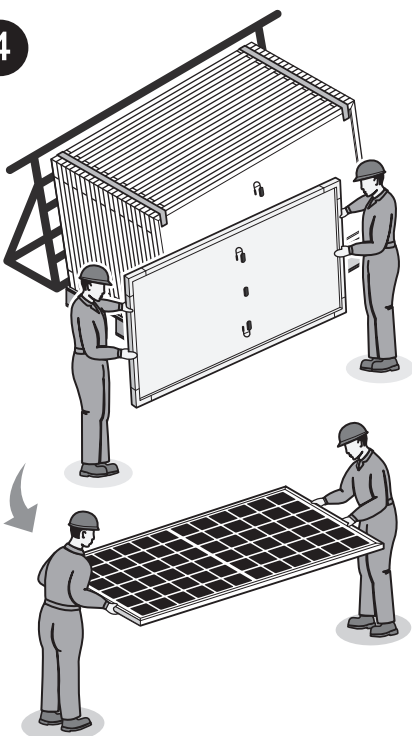


两人站在组件两侧，拨离最外侧组件的玻纤胶带，双手扶正最外侧组件，同时将玻纤胶带外檐粘贴至下一块组件边框表面；然后拿起最外侧组件并旋转 90° 平放，搬离至安装处，按照相同步骤按序搬离剩余组件。

Two people stand on the opposite sides of the module, remove the glass fiber tape of the outside module, straighten the outside module with both hands, paste the glass fiber tape to the next module's surface; then rotate the outside module 90°, lift flatly to the installation place, and repeat for remaining modules.

备注：若组件拆开后未立即安装，需从立式转为平放：首先在托盘上放一个包装箱上盖，然后把第一块组件接线盒面朝下，其余组件接线盒面朝上进行堆叠，并放置覆盖膜后重新打包；注意最高堆码片数不超过一箱组件的数量。


Note: If the modules are not installed immediately after being take out, they need to be converted from vertical to flat: First place the first module with the junction box face down on the pallet with a box lid, then stack the remaining modules with the junction boxes face up and re-packaged with a plastic film sleeve.

Please note that the maximum number of stacked pieces can not exceed the number of modules in one box.

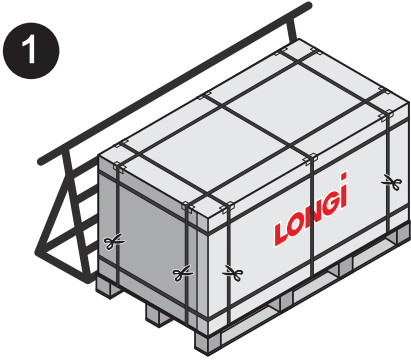


需要将待拆包的整托组件长边靠近坚实的支撑物：优先防倒支架、墙壁或者一托同规格且未拆组件(距离约为 15~20cm)，然后用工具剪断外包装全部打包带。

The long side of the whole pallet assembly to be unpacked against solid supports: an anti-fall bracket, a wall or another undismantled component of the same specification (the distance is about 15~20cm), and then cut all the packaging tape of the outer packaging with a tool.

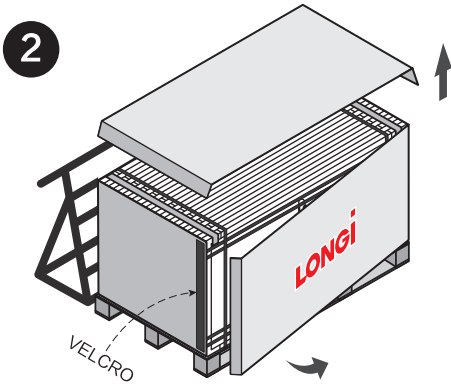


先移去箱盖上的覆盖膜和围板四周的缠绕膜，同时移除上盖；然后将围板上的玻纤胶带两端撕开，撕开围板对角魔术贴并移除围板。

First remove the covering film on the lid and the wrapping film around the sealing plate, while remove the top cover. Then tear off both ends of the glass fiber tape on the sealing plate, and peel off the diagonal Velcro tape, to remove the sealing plate.

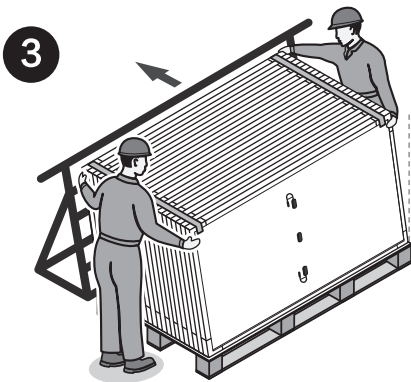

两人扶住组件，防止组件倾倒，第三人拆开打包带和内护楞；* 请勿移除玻纤胶带，然后轻推使组件斜靠在支撑物上。

Two people hold on to the modules to prevent them from tipping. The third person disassembles the strapping strap and inner corrugation; Please not remove the fiberglass tape, and then gently pushes the modules to lean against the support.

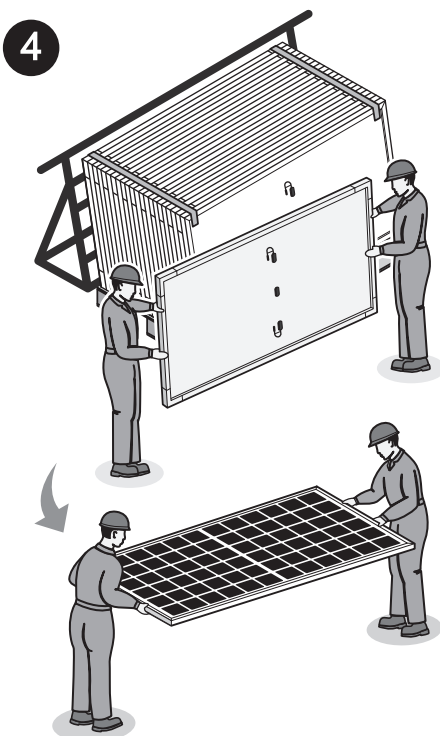

两人站在组件两侧，拨离最外侧组件的玻纤胶带，双手扶正最外侧组件，同时将玻纤胶带外檐粘贴至下一块组件边框表面；然后拿起最外侧组件并旋转 90° 平抬，搬离至安装处，按照相同步骤按序搬离剩余组件。


Two people stand on the opposite sides of the module, remove the glass fiber tape of the outside module, straighten the outside module with both hands, paste the glass fiber tape to the next module's surface; then rotate the outside module 90°, lift flatly to the installation place, and repeat for remaining modules.

备注：若组件拆开后未立即安装，需从立式转为平放：首先在托盘上放一个包装箱上盖，然后把第一块组件接线盒面朝下，其余组件接线盒面朝上进行堆叠，并放置覆盖膜后重新打包；注意最高堆码片数不超过一箱组件的数量。

Note: If the modules are not installed immediately after being take out, they need to be converted from vertical to flat: First place the first module with the junction box face down on the pallet with a box lid, then stack the remaining modules with the junction boxes face up and re-packaged with a plastic film sleeve.

Please note that the maximum number of stacked pieces can not exceed the number of modules in one box.


1



将待拆包的整托组件放置在可支撑的水平位置或地面，然后使用工具剪断外包装全部打包带。

Place the packing assembly in a supported horizontal position or on the ground, and then cut all the packaging tape of the outer packaging with a tool.


2

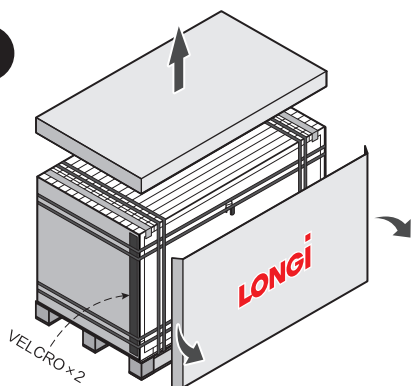

先移去箱盖上的覆盖膜和围板四周的缠绕膜，同时移除上盖；然后撕开围板正面两侧魔术贴并移除正面围板。

First remove the covering film on the lid and the wrapping film around the sealing plate, while removing the top cover. Then tear the Velcro on both sides of the front coaming and remove the front coaming.


3

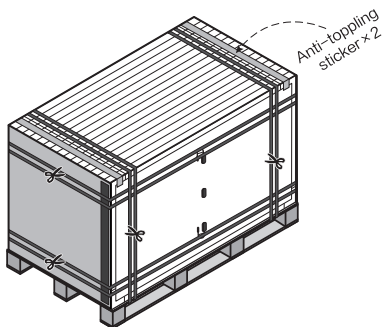

建议两人扶住组件，防止组件倾倒，第三人使用工具剪断内部全部打包带；
* 请勿移除组件表面上的两个防倒贴。

Two people are recommended to hold the modules to prevent them from tipping over. A third person cuts the internal strapping with a tool; Please do not remove the two anti-toppling stickers on the modules.

4

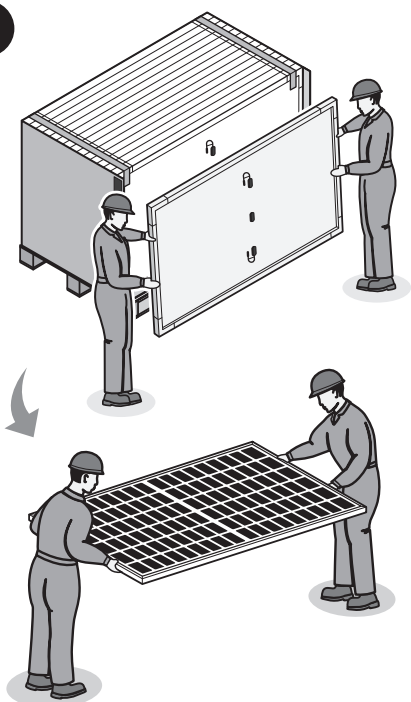

两人站在组件两侧，拨离最外侧组件的防倒贴，双手扶正最外侧组件，同时将防倒贴外檐粘贴至下一块组件边框表面；然后拿起最外侧组件并旋转 90° 平抬，搬离至安装处，按照相同步骤按序搬离剩余组件。

Two people stand on the opposite sides of the module, remove the anti-toppling stickers of the outside module, straighten the outside module with both hands, and paste the anti-toppling stickers to the next module's surface; then rotate the outside module 90°, lift it out flat to the installation place, and repeat for remaining modules.

备注：若组件拆开后未立即安装，需从立式转为平放：首先在托盘上放一个包装箱上盖，然后把第一块组件接线盒面朝下，其余组件接线盒面朝上进行堆叠，并放置覆盖膜后重新打包；注意最高堆码片数不超过一箱组件的数量。

Note: If the modules are not installed immediately after being take out, they need to be converted from vertical to flat : First place the first module with the junction box face down on the pallet with a box lid, then stack the remaining modules with the junction boxes face up and re-packaged with a plastic film sleeve.

Please note that the maximum number of stacked pieces can not exceed the number of modules in one box.